

DEUTZ TCD 3.9/4.0 L4



Powerful, efficient and compact.

For mobile machinery

The TCD 3.9/4.0 – With 75 up to 130 kW power output ideal for your application.

- **POWERFUL** / Up to 130 kW & 700 Nm
- **LOW EMISSIONS** / EU St.V & US Tier 4 certified; HVO ready
- **MODULAR** / Wide range of applications due to a variety of options
- **VERSATILE** / 3.9 and 4.0 - version





STAGE **V**
certified

CHINA
ready **4**

DEUTZ TCD 3.9


— TCD 3.9
— TCD 4.0

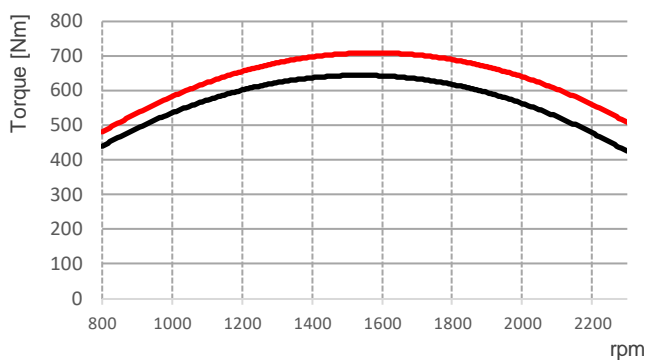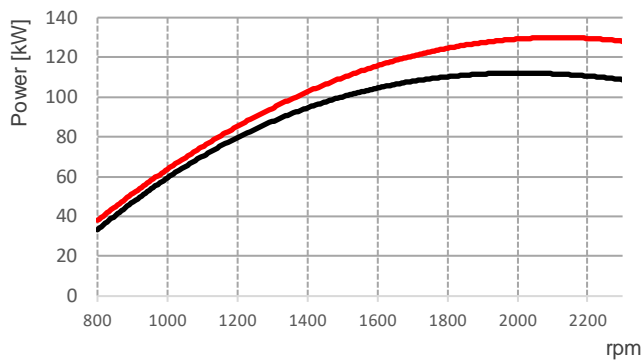

TECHNICAL DATA

ENGINE TYPE		TCD 3.9	TCD 4.0
No. of Cylinders		4	4
Displacement	l	3.94	3.94
Max. Nominal speed	min ⁻¹	2300	2300
Aspiration		Turbocharger with charge air cooler	Turbocharger with charge air cooler
Power Output acc. ISO 14396	kW	75 - 110	110 - 129.4
At Speed	min ⁻¹	2300	2200
Max. Torque	Nm	642	700
At Speed	min ⁻¹	1300 - 1600	1300 - 1600
Min. Idling Speed	min ⁻¹	-	-
Weight (DIN 70020 Part 7A)	kg	-	-

DIMENSIONS

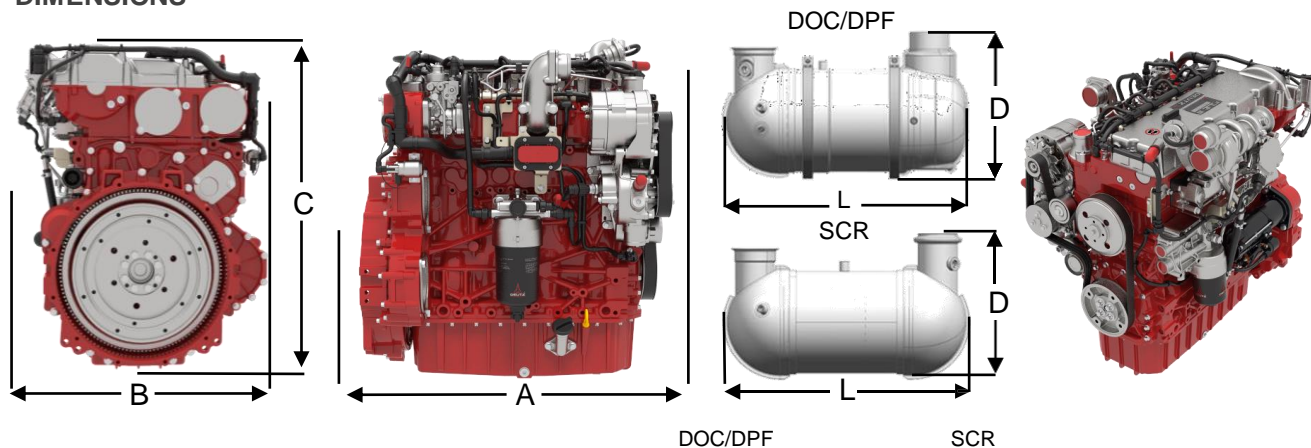

ENGINE TYPE		A	B	C	D	DOC/DPF		SCR		DOC/DPF	SCR
TCD 3.9	mm	760	680	843	-	-	-	-	-	● ■	● ■
TCD 4.0	mm	760	680	843	-	-	-	-	-	● ■	● ■

● Standard for US Tier 4
● Standard for EU Stage V

