



KARER

TECHNICAL BROCHURE

UT 22

UNDERGROUND TRUCK

11 M³ DUMP BOX VOLUME, 22 TONS PAYLOAD CAPACITY



KARER UT 22 is an articulated underground mining truck with a 22-ton capacity. It's packed with innovative features to handle the toughest conditions, providing the power, strength and reliability to help you maximize productivity.

The central articulation adopts a 100% maintenance-free, fully sealed rotary joint device, which can shorten downtime and reduce operating costs, and ensure that the front and rear frames can swing freely to form good contact with the ground under harsh working conditions.

Adopt Euro 5 (Stage V) or Euro 3 emission VOLVO PENTA engine, which has quick response, excellent efficiency and excellent service life. You have peace of mind with the high-efficiency, low-fuel consumption, easy-to-access spare parts Volvo (Sweden) brand engine.

The automatic shifting DANA transmission provides unparalleled transmission efficiency and control. The transmission is durable, has a long service life, and is equipped with a lock-up mechanism.

All four wheels with KESSLER (Germany) are equipped with spring-loaded, hydraulically released normally closed wet multi-disc brakes, which, combined with an automatically controlled hydraulic retarder to assist braking, give the vehicle excellent braking performance.

The ROPS/FOPS certified cab can be equipped with cooling and heating air conditioning systems, an ergonomically designed operator station, and adjustable suspension that meets the product's vibration level, allowing operators to more effectively control the equipment in a safe, comfortable and efficient environment.

The electromechanical and hydraulic integrated control system monitors all equipment parameters in real time to ensure human and machine safety. The cab allows for quick viewing of various information and provides fault diagnosis.

CAPACITIES	
Standard Dump Box	11 m ³
Payload	22,000 kg
Max Climbing Grade	15°
Dumping Angle	65°
Oscillation	8°

DIMENSIONS	
Length*Width*Height	929*226*236 cm
Min. Ground Clearance	39 cm

SPEEDS	
Speed (1st Gear)	6.0 km/h
Speed (2nd Gear)	10.5 km/h
Speed (3rd Gear)	21.5 km/h
Speed (4th Gear)	27.7 km/h

WEIGHTS	
Operating Weight	23,500 kg
Loaded Weight	45,500 kg
Front Axle (Unloaded)	16,100 kg
Rear Axle (Unloaded)	7,400 kg
Front Axle (Loaded)	21,480 kg
Rear Axle (Loaded)	24,020 kg

*Truck weight depends on options selected

TRANSMISSION	
Torque Converter	
Brand	DANA
Model	CL8000 Series with torque converter lockup
Gearbox	
Brand	DANA
Model	6000 Series
Features	Electronic shifting Gear shifting operation and steering handle integrated control Four gears forward and reverse

AXLES	
Brand	Kessler (Germany)
Front Axle	Model: D91 SAHR (Spring Applied Hydraulic Release) Standard Oscillation
Rear Axle	Model: D91 SAHR (Spring Applied Hydraulic Release) Standard Fixed

BRAKES
It adopts spring brake, fully enclosed multi-disc wet brake
It integrates service brake, parking brake and emergency brake
It has two independent pipeline controls, one for the front axle and the other for the rear axle
Automatic brake activation system
Manual emergency brake release pump is standard. In case of engine stoppage, truck can be easily withdrawn from underground



ENGINE	
Model	VOLVO TAD 883 VE
Power	235kW(320 Hp)@2200rpm
Max. Torque	1330 Nm@1400rpm
Cylinder	In Line 6
Electric	24 V
Control System	Electronic fuel injection system
Cooling System	Water-cooled engine
Starter	7.8 kW motor
Emission	Stage V (Euro 5)
Air Intake	Turbocharged Dry air filtration Prefiltration Two-stage filtration
Exhaust System	Aftertreatment system
Average fuel consumption at 50% load	23.5 L/h

TANK CAPASITIES	
Fuel Tank	240 liters
Working Hydraulic Oil Tank	240 liters
Brake Hydraulic Oil Tank	80 liters

ELECTRIC	
Battery	2 * 12V, 165 Ah
Starter	7.8 kW / 24 V
Dynamo	28 V, 100 A
Dual power main switch is standard with locking	
Horn/Back-up siren is standard	
Flashing warning lights are standard	

Parking/ brake indicator lights are standard	
Control System	Programmable
	Built-in diagnostic system
	7" color display
Camera System	1 pc camera at the rear
	1 pc monitor in the cabin
Driving Lights	
Front	2 pcs
Rear	4 pcs
Brake (at rear)	2 pcs
Turning signal	2 pcs on the front rack
	2 pcs on the rear rack
Red and green indicator lights	2 pcs on the front rack
	2 pcs on the rear rack
Reversing alarm	1 pc

Cabin

The cabin provides an excellent ergonomic operating space, reducing operator fatigue by increasing legroom and improving pedal position.

The cabin has passed ROPS/FOPS certification to protect the operator's safety.

The closed cabin interior is made of 25mm flame-retardant and noise-reducing interior fabric, which is not only beautiful and comfortable, but also effective in dust prevention and noise reduction.

The cabin and frame are fixed with rubber shock absorbers to reduce the vibration of the cabin.

CABIN
ROPS certified according to ISO 3471
FOPS certified according to ISO 3449
Closed air-conditioned cab
Large windshield, sliding windows and rearview mirrors
Laminated glass windows, using four sealing strips, glass can be removed inside and outside
Sound-absorbing, noise reducing and flame-retardant interior and thermal insulation cotton
Emergency exit
Washable cabin floor to reduce dust
Adjustable operating handle and armrest
Three-point entry system for the cabin
Main circuit breaker release button
Seating area with very good two-way visibility and comfortable use during operation

DASHBOARD

The color display 7" screen can flexibly switch between various interfaces and adjust brightness, time, download/upload programs and other operations

Display screen can display machine parameters and various alarm information, allowing the operator to understand the real-time status of the truck and operate the truck more efficiently and safely

Industrial standard intelligent control system

Warning and alarm systems have sound and light alarm prompts

Dashboard is 7" color display

Dashboard has fully functional rocker switch control, clearly colored status and warning lights, fault diagnosis, communication interface

SEAT

The driver's seat is an adjustable spring-shock-absorbing seat with a three-point safety belt

The seat can be adjusted up and down, front and back

The seat is equipped with a padded arm rest and an adjustable joystick that can be installed on the canopy door or the right wall of the canopy

Spring shock absorber

Height adjustable

Adjustable arm rests

Adjustable back support

WHEELS

Tire Dimensions	18.00 R25
-----------------	-----------

FRAME (CHASSIS)

Dump box made of high-strength, wear-resistant steel

Adopt high-strength alloy steel plate, optimize material thickness, improve overall transportation capacity, and prolong the structure life

Central hinge is slewing bearing

HYDRAULIC SYSTEM

When the cabin door is not locked, the truck is braked

Working efficiency is increased with 2 radiators, namely hydraulic oil radiator and transmission oil radiator

Cooling motor brand is Parker

STEERING HYDRAULIC SYSTEM

Steering wheel is used for steering
Fully hydraulic central articulated steering
Steering main valve is open type
Two double-acting steering hydraulic cylinders
Steering pump is gear pump and Danfoss brand
Working steering pump brand is Casappa

DUMP BOX HYDRAULIC SYSTEM

When not steering, the steering hydraulic pump merges with the working hydraulic pump to improve work efficiency	
Working valve brand is Walvoil	
Lifting cylinder	2 pcs
Dump box main valve	open type
Dump box pump	gear pump

BRAKE HYDRAULIC SYSTEM

It adopts spring brake and fully enclosed multi-disc wet brake; it integrates service brake, parking brake and emergency brake.	
Automatic brake activation system	
Manual emergency brake release pump	
Brake valve brand is Mico	

WORKING ENVIRONMENT CONDITIONS

Temperature	-15°C ~ +45°C
Altitude	-1500 m to + 3000 m at 25°C without rated power derate

STANDARD FEATURES

Portable fire extinguisher
Heat source isolation protection cover
Exhaust pipe insulation cotton protection
Turbocharger guard
Cooling fan guard
Main power switch can be locked
Automatic centralized lubrication system
Emergency stop button is 1 pc in rear rack and 1 pc in the cabin
Engine water tank manual pressure release cap
Accumulator manual pressure relief device
Dump box inspection locking device
Electric emergency brake release pump
Manual emergency brake release pump
Front and rear axle locking device
Closed cabin
Manual centralized lubrication system
Air conditioning and refrigeration system
Air conditioning and heating system

OPTIONAL ENGINE

Model	VOLVO TAD 853 VE
Power	235kW (320 Hp)@2200rpm
Max. Torque	1310 Nm@1450rpm
Cylinder	In Line 6
Electric	24 V
Control System	Electronic fuel injection
Cooling System	Water-cooled engine
Starter	7.8 kW motor
Emission	Euro 3
Air Intake	Turbocharged Dry air Filtration+Prefiltration Two-stage filtration
Exhaust System	Catalytic Converter
Average fuel consumption at 50% load	23.5 L/h

OPTIONS

Automatic centralized lubrication system
Manual dry powder fire extinguishing system
Automatic dry powder fire extinguishing system
Front window defogger function
Manual emergency brake release pump
Emergency steering
Automatic weighing system
Driving recorder
Tire pressure monitoring system
Push-away dump box
Customize other dump box capacities
Replace tires
Remote control system
Anti-collision system
Production management system
Unmanned driving system




DOCUMENTS


Machine operation manual (Turkish-English)
Machine maintenance manual (Turkish-English)
Machine spare parts manual (Turkish-English)

Grade Performance Data

Volvo Penta TAD883VE Stage V (3% rolling resistance assumed, with lock-up engaged)					
Grade (%)	0	5	10	15	20
Ratio					
Unloaded					
1st gear (km/h)	6.1	5.5	4.6	4.6	4.4
2nd gear (km/h)	10.7	9.7	8.7	7.7	6.3
3rd gear (km/h)	21.7	15.9	11.0	6.2	
4th gear (km/h)	27.8	15.8	2.8		
Loaded					
1st gear (km/h)	6.0	5.4	4.4	4.2	4.0
2nd gear (km/h)	10.5	9.4	7.9	6.9	5.8
3rd gear (km/h)	21.5	15.8	8.6		
4th gear (km/h)	27.7	15.7			



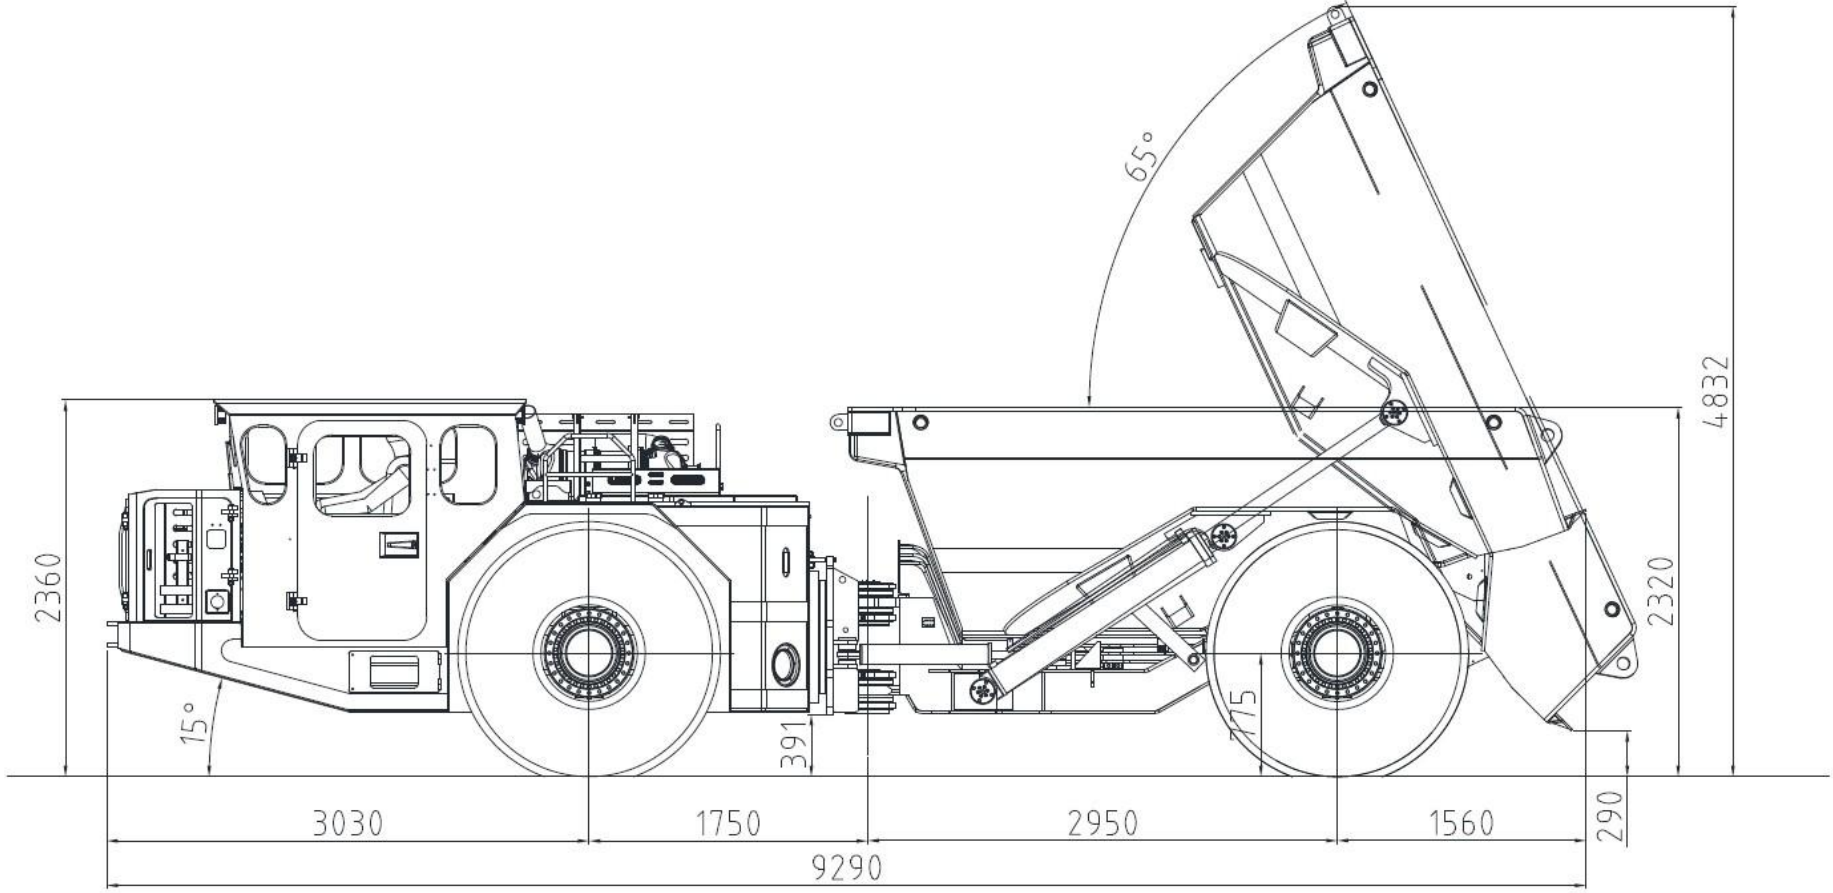

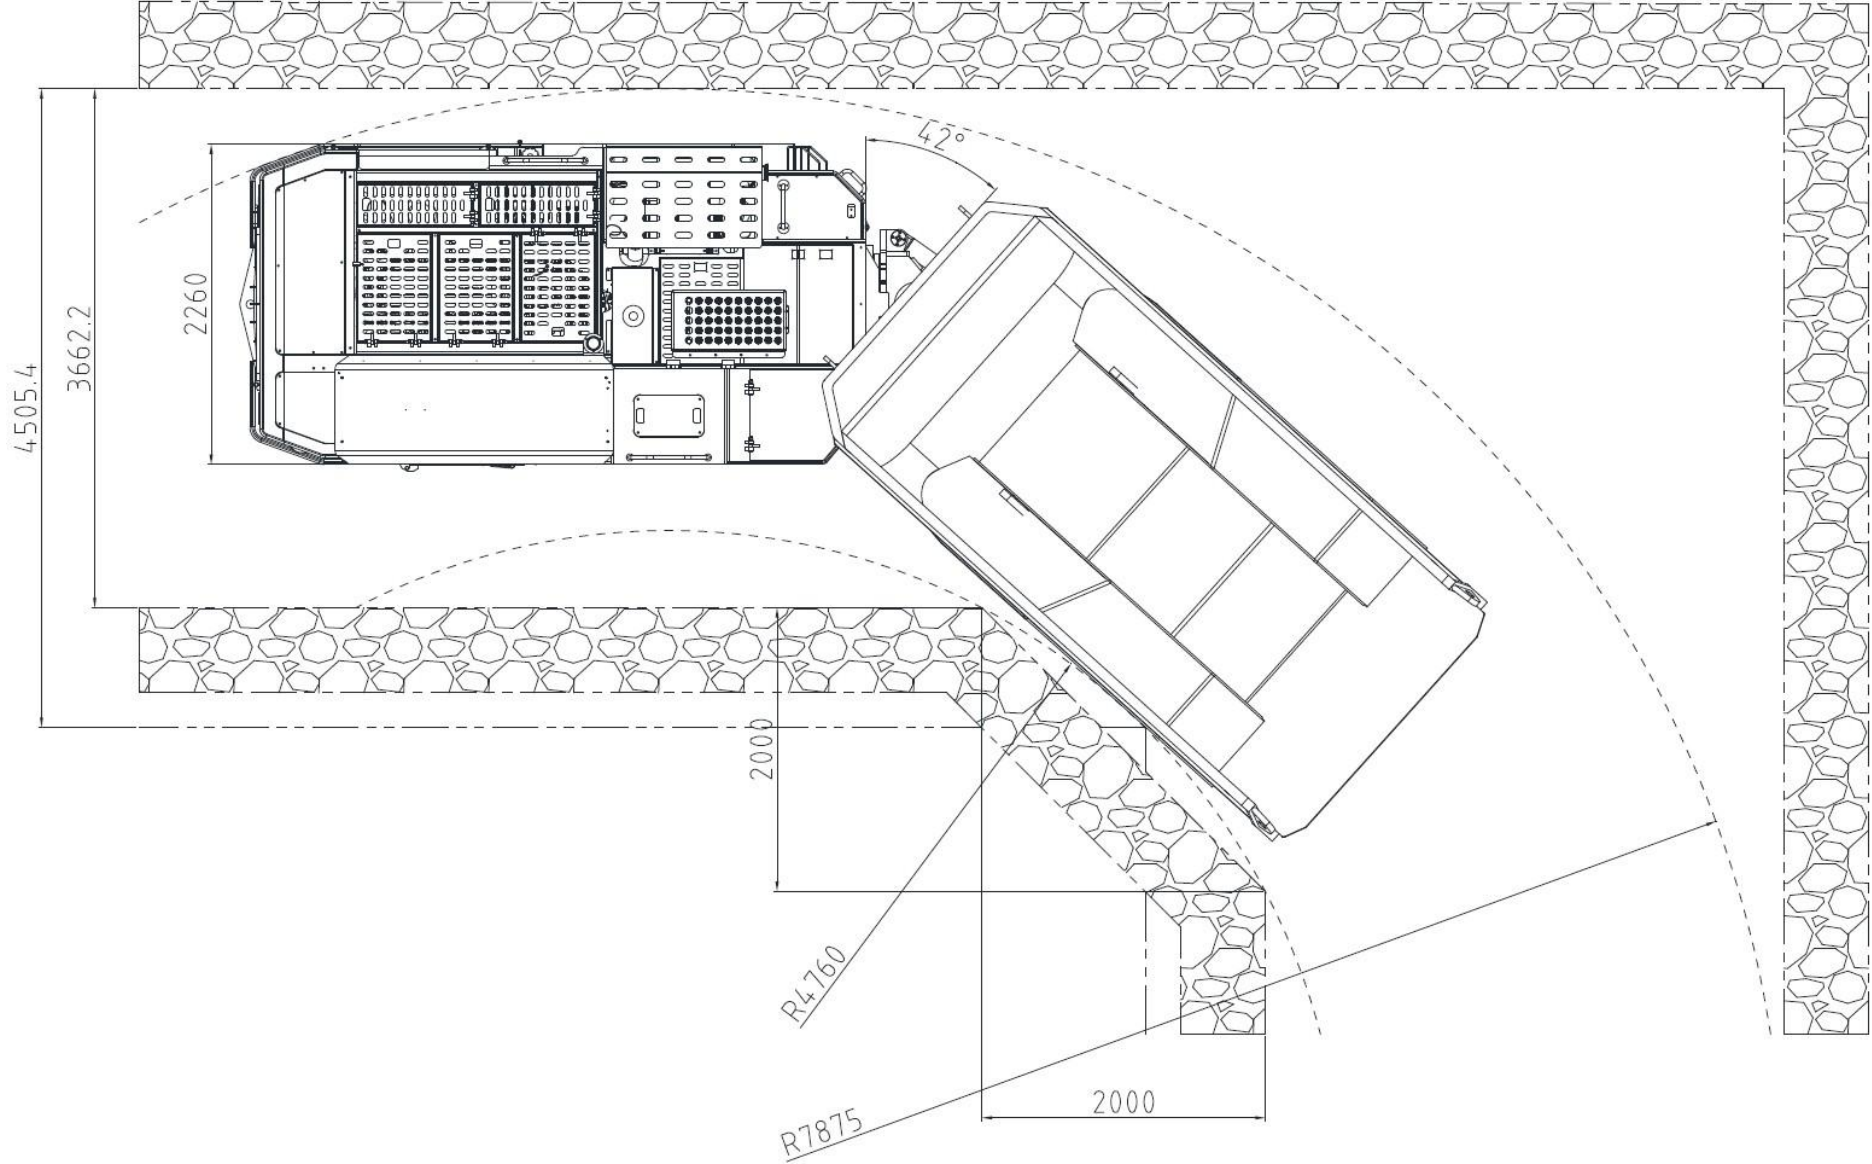



KARER KARADAVUT ERDEM MAKİNA ENERJİ SANAYİ VE TİCARET LİMİTED ŞİRKETİ

+90 553 531 77 50 satis@karer.tr

Ostim OSB Mh. 1235. Cd. No:81 Yenimahalle / ANKARA

www.karer.tr